

Fig. 1

FOUO 50 45 58 60




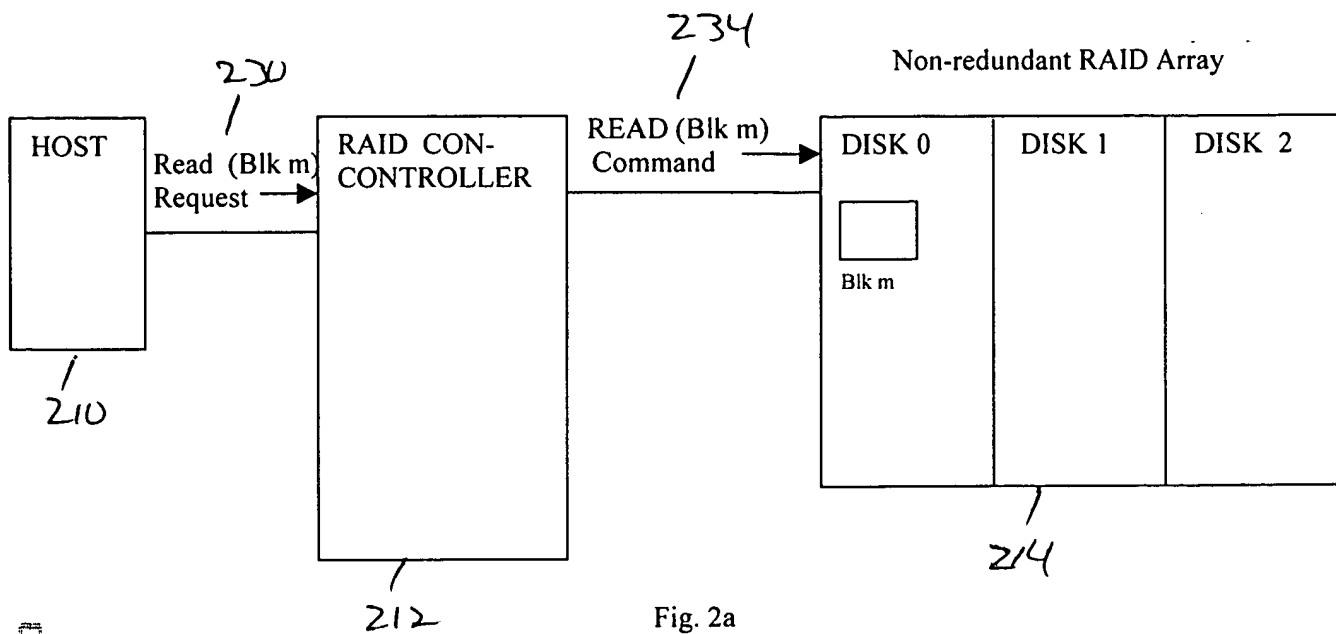


Fig. 2a

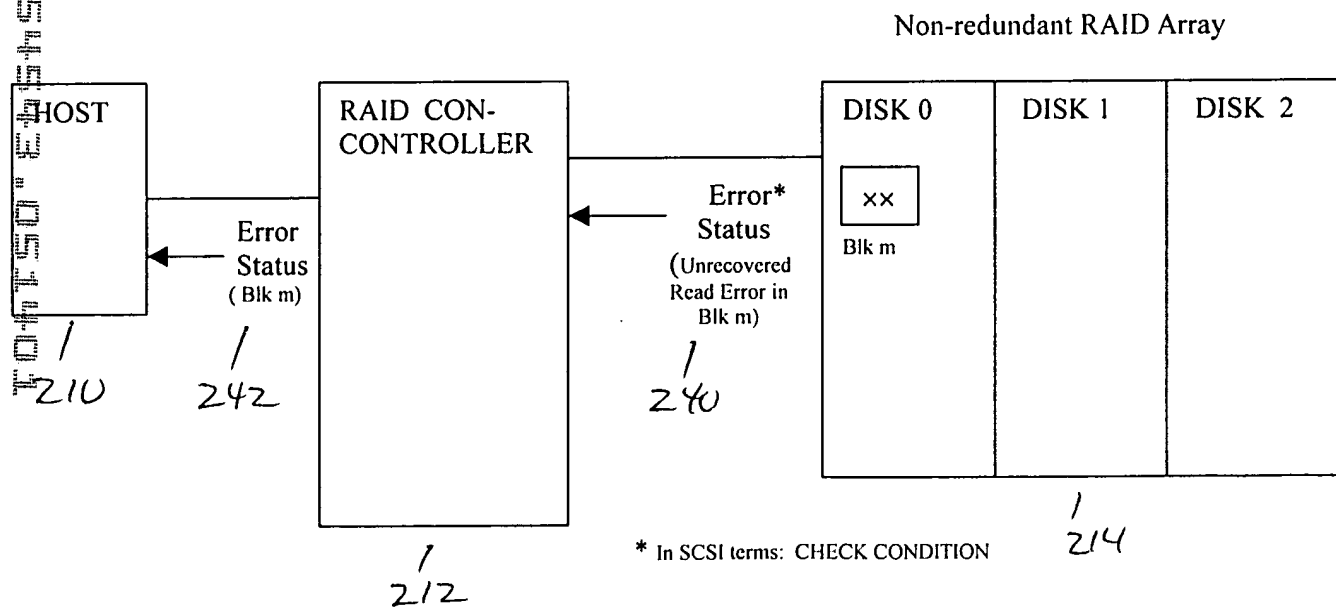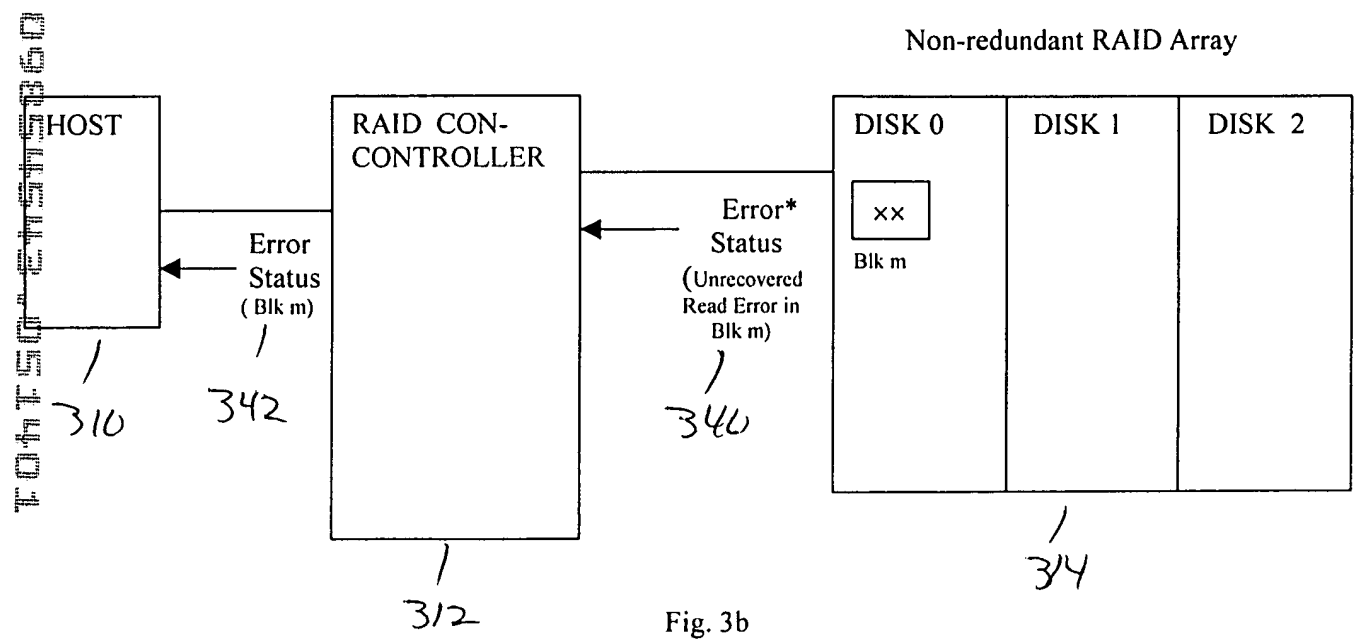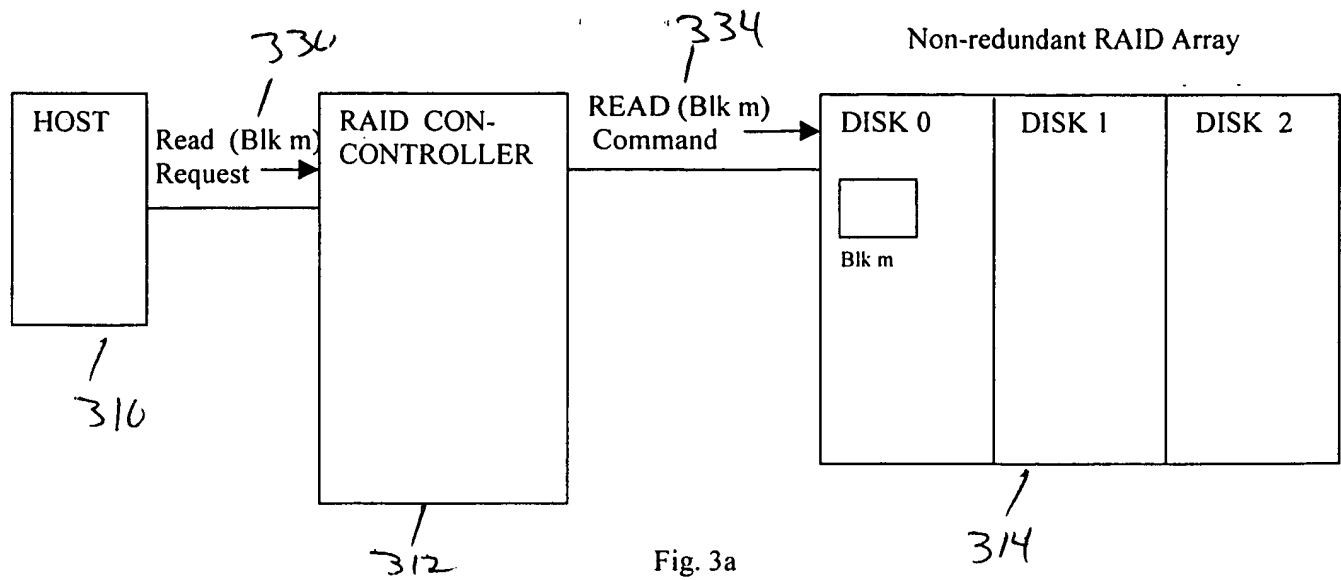

\* In SCSI terms: CHECK CONDITION

Fig. 2b



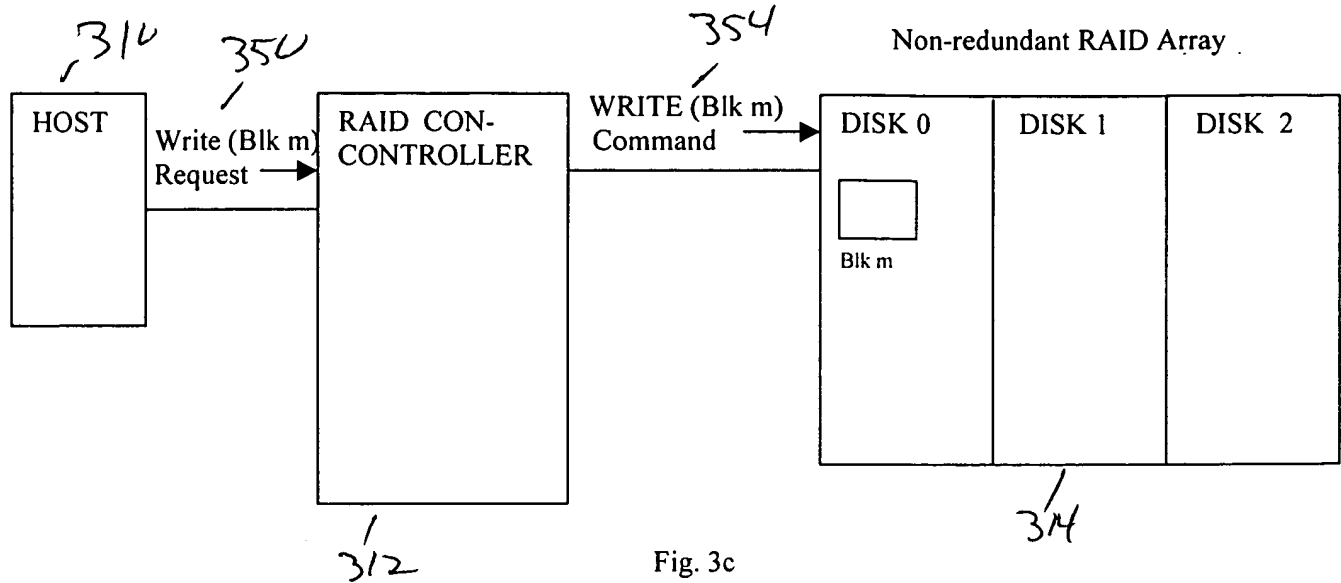


Fig. 3c

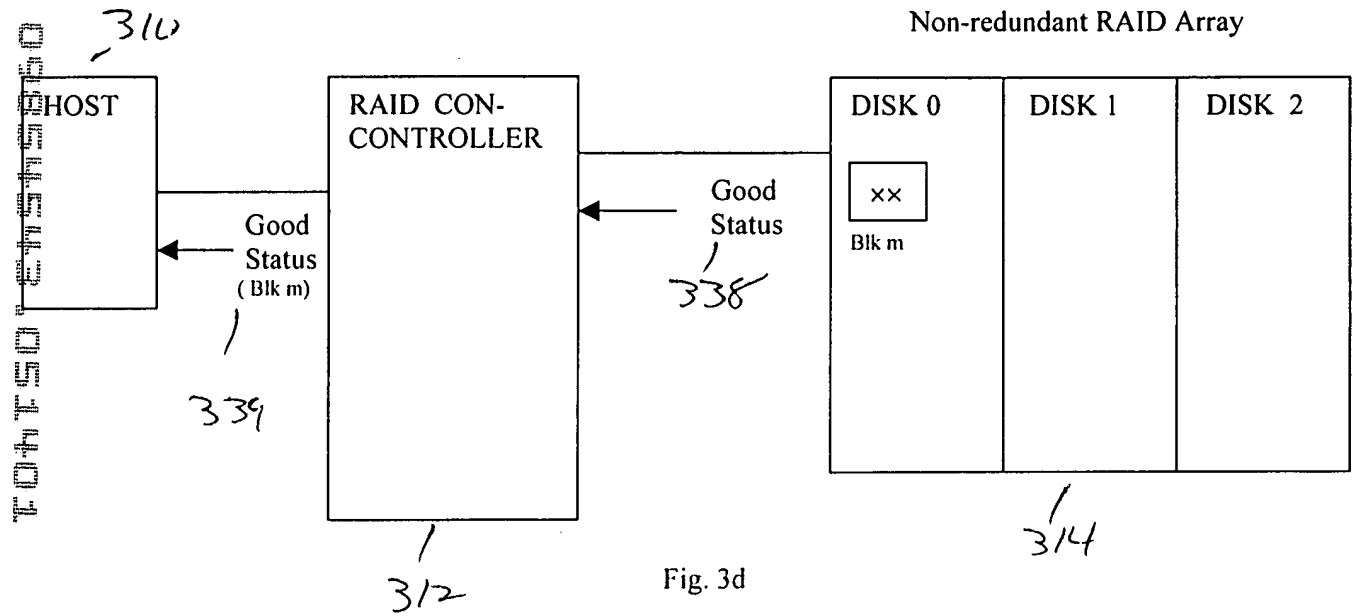


Fig. 3d

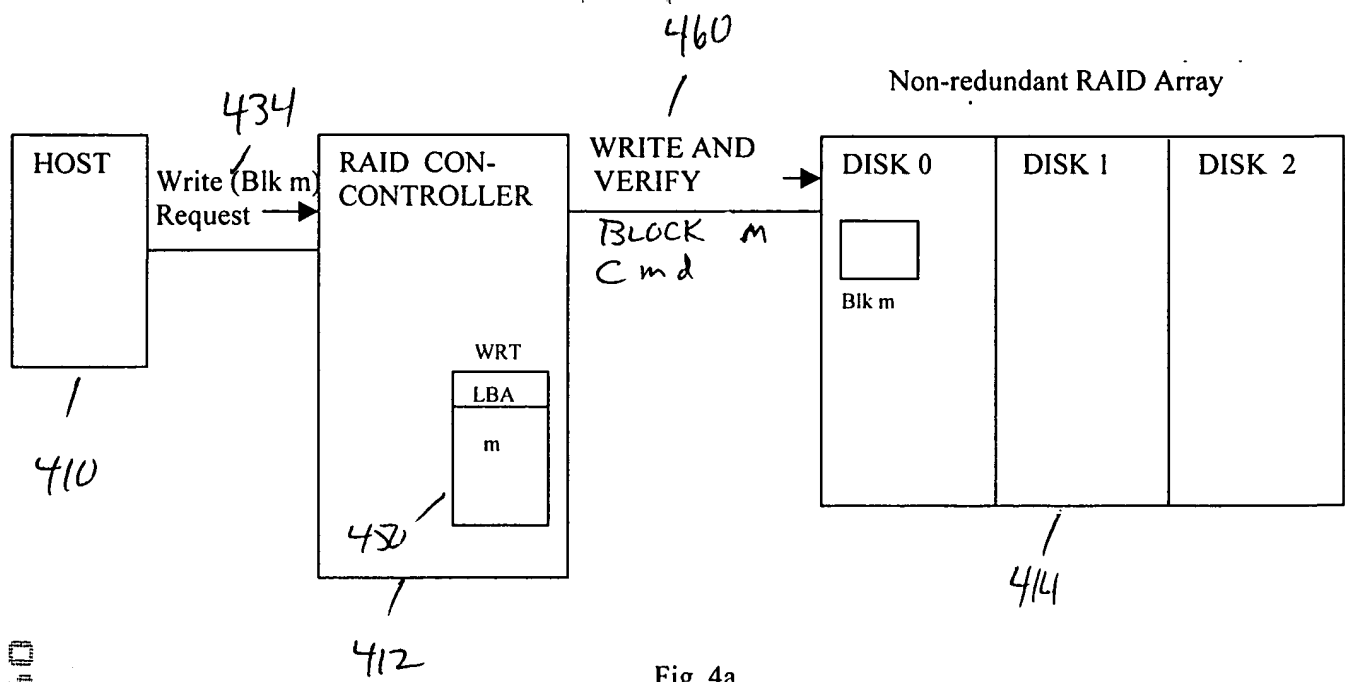


Fig. 4a

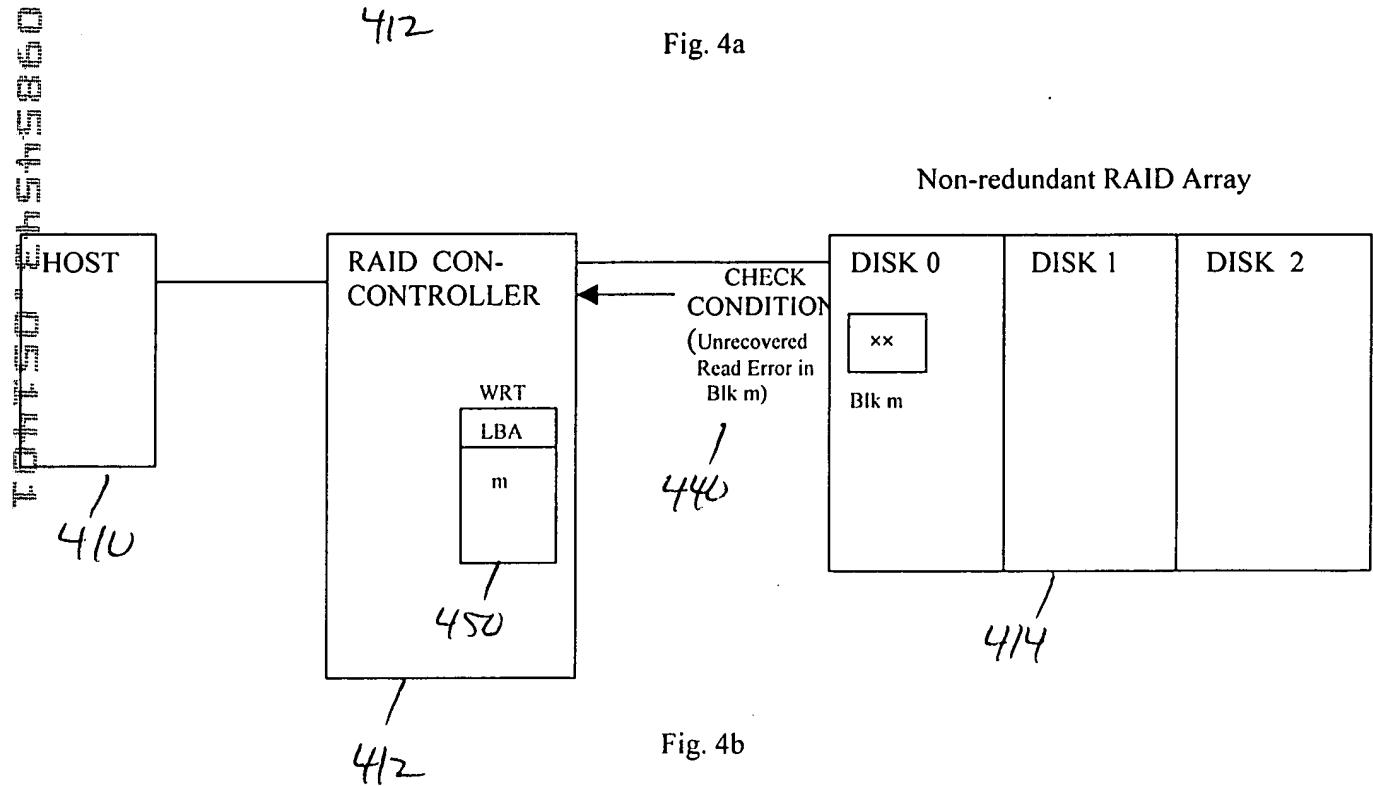


Fig. 4b

Non-redundant RAID Array.

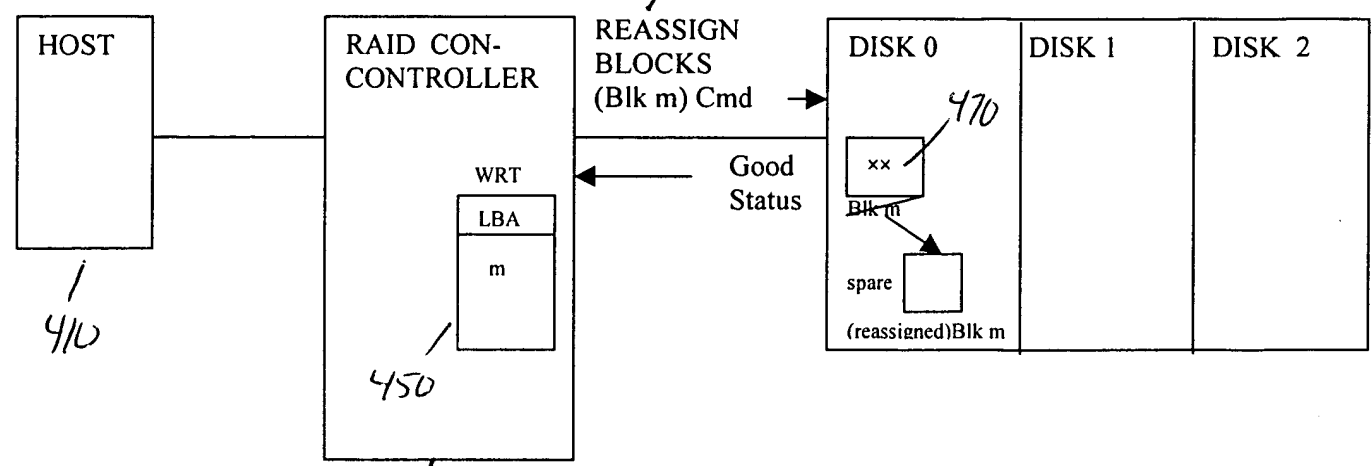


Fig. 4c

Non-redundant RAID Array

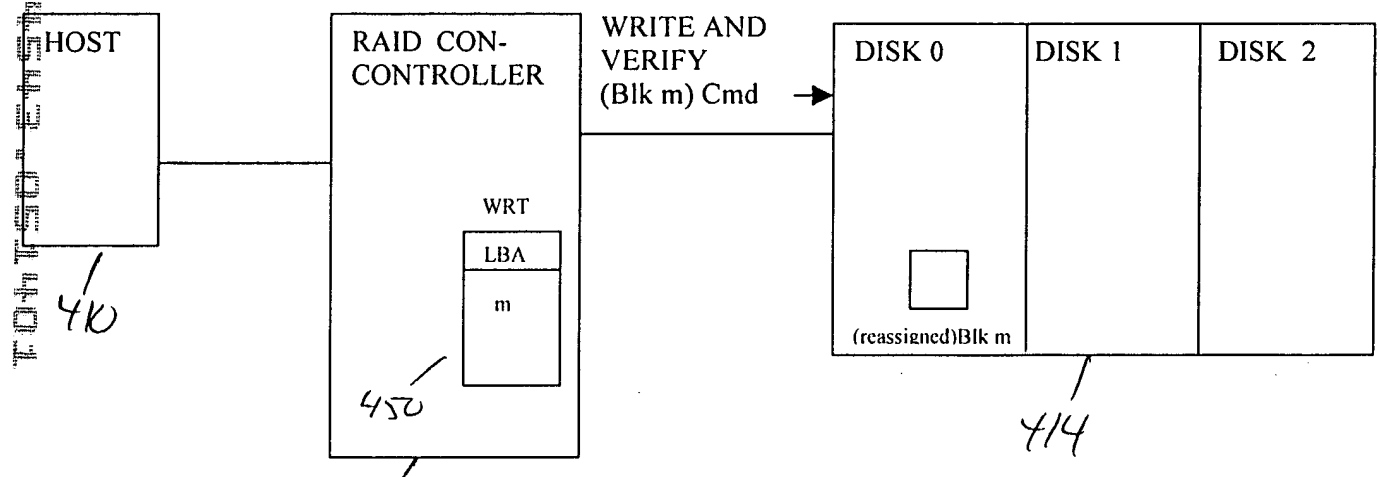


Fig. 4d

104T50" 24545860

# Non-redundant RAID Array

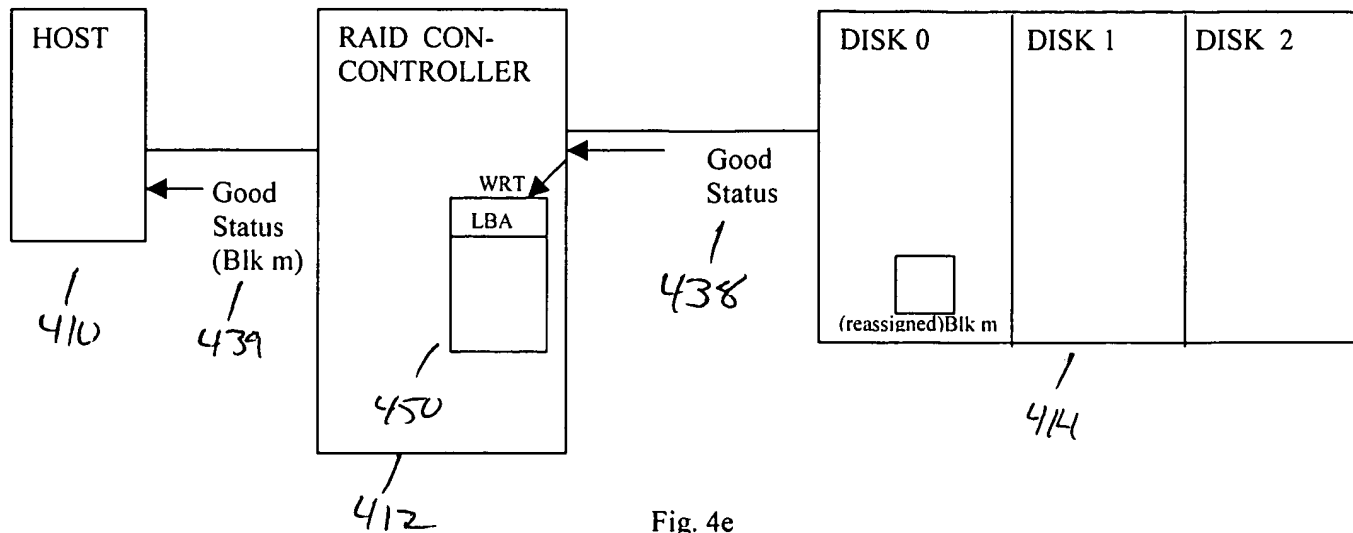


Fig. 4e

500  
516      520

LBA (hex)	Write Recovery bit	Explanation
00 00 A2 C0	1	Had a read error, req'ing write recovery on write, cleared after
01 24 60 3B	0	Known bad data, read error status to host; cleared on write
FF FF FF FF	0	Not a valid entry

Fig. 5

09854543-054401



0054543 051401

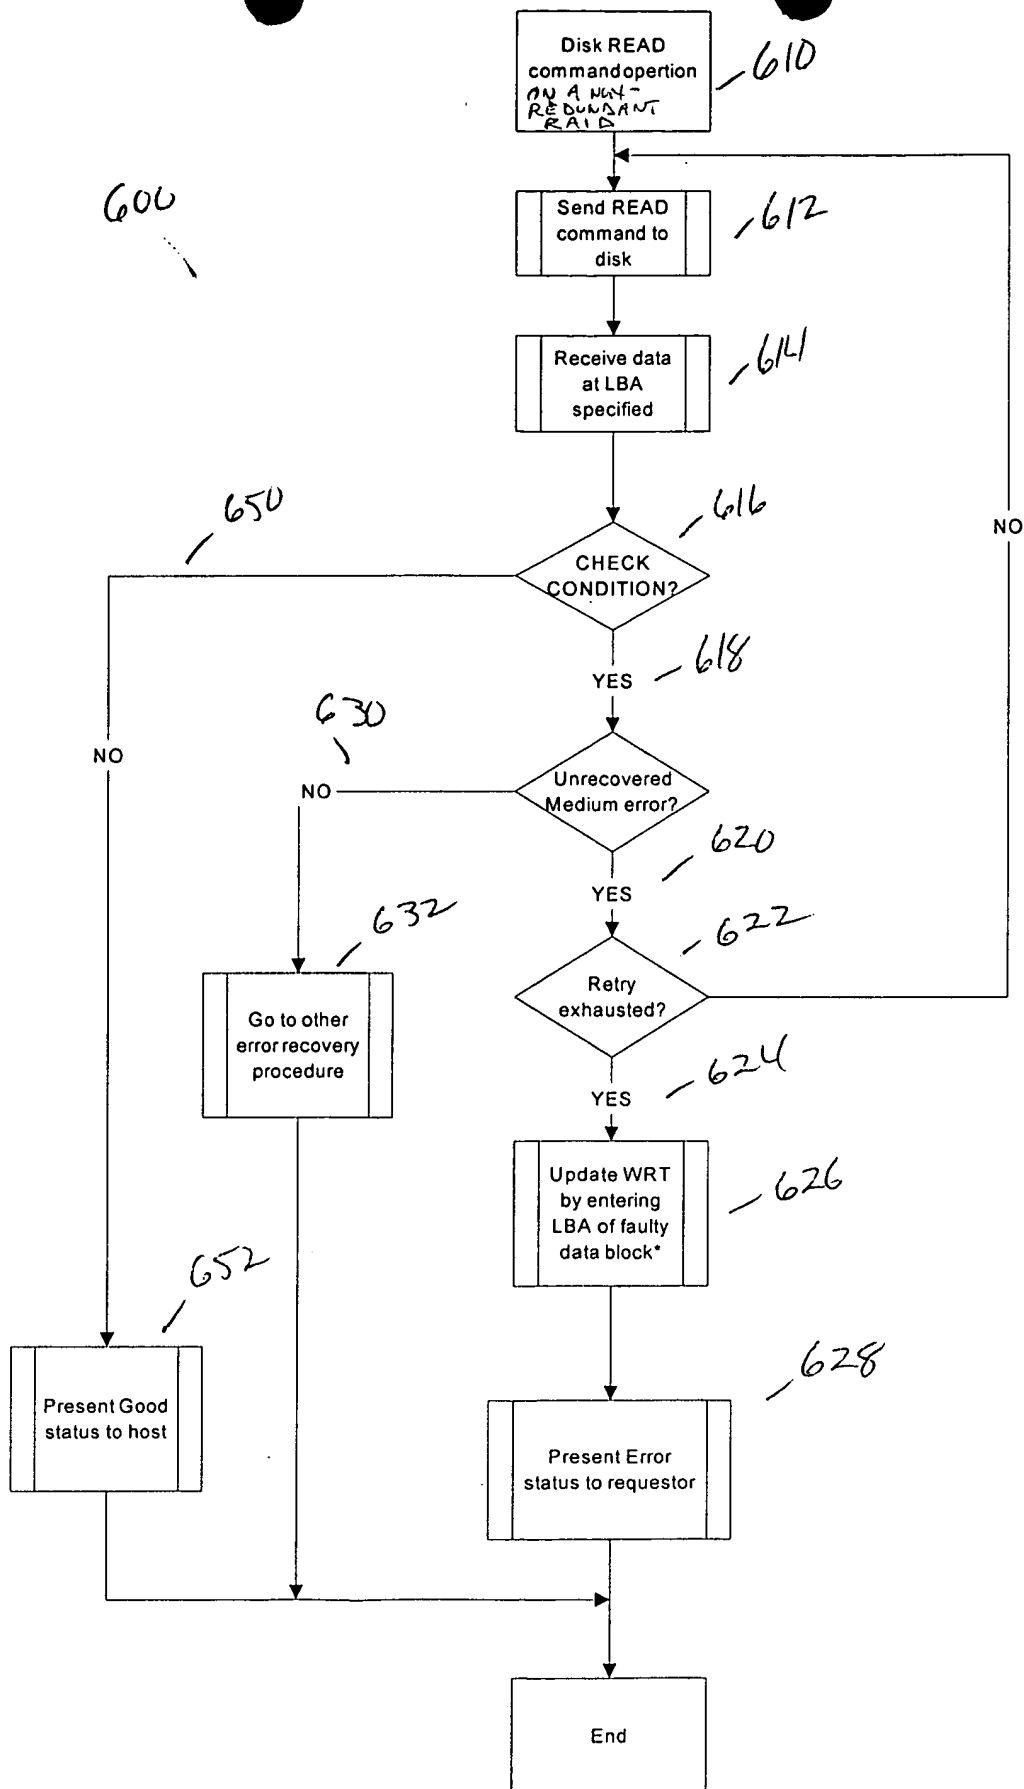


Fig. 6

00054543-051404

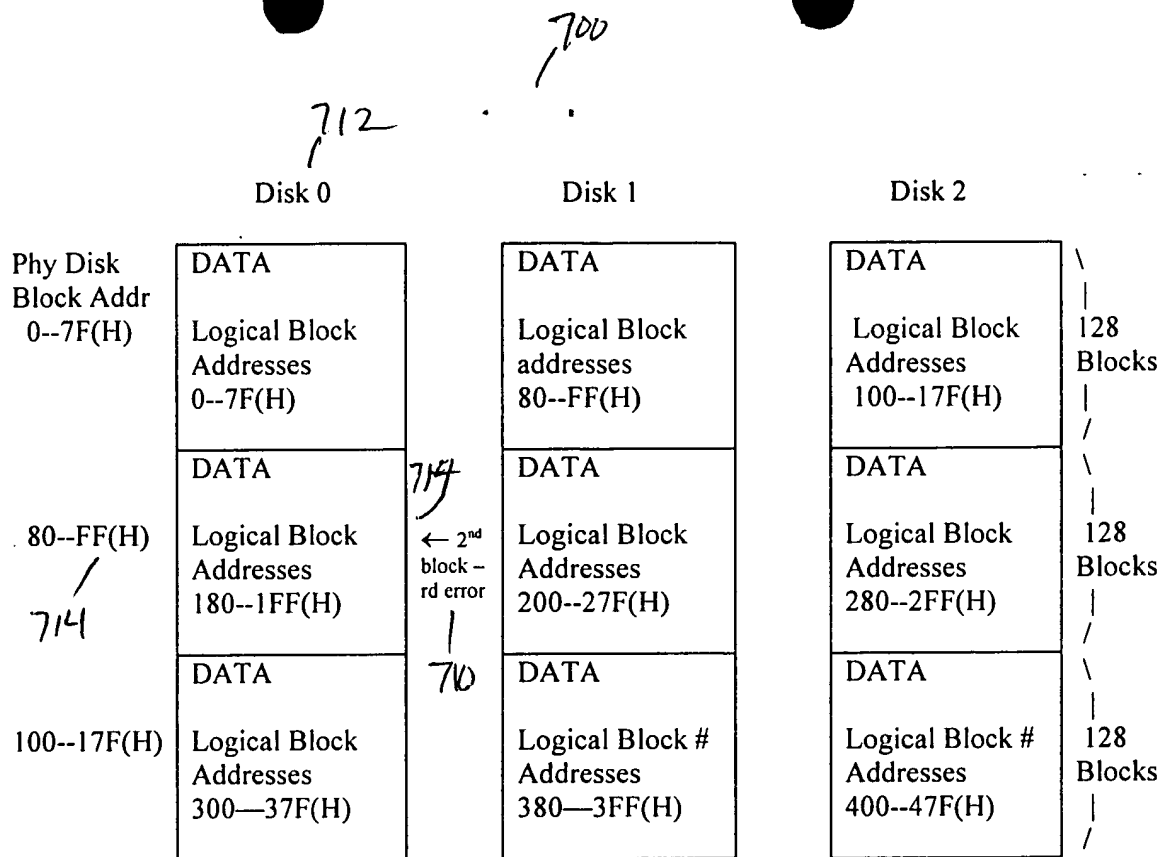


Fig. 7

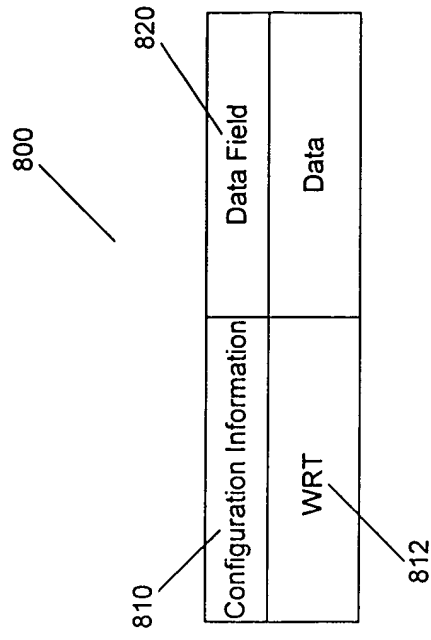


Fig. 8

104T50" E4545860

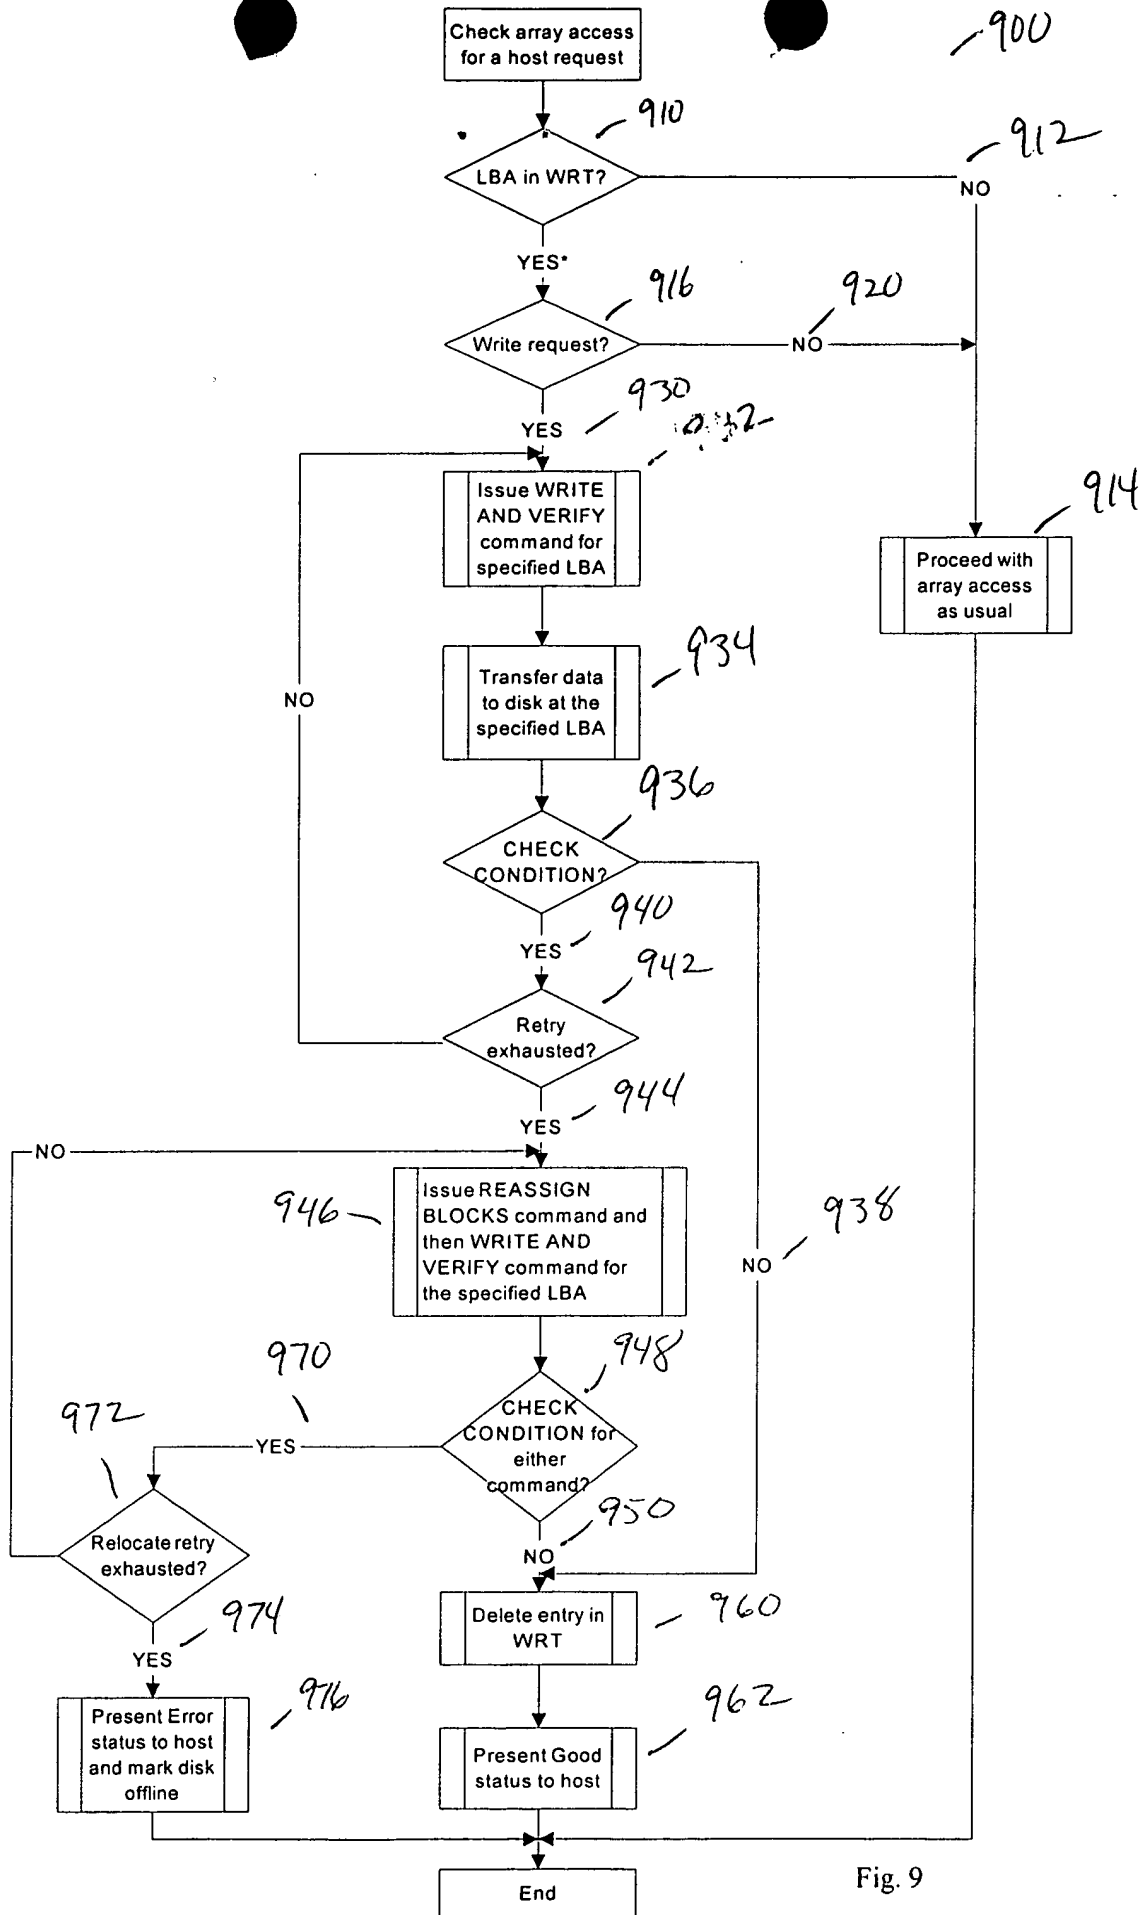


Fig. 9

000454.051401

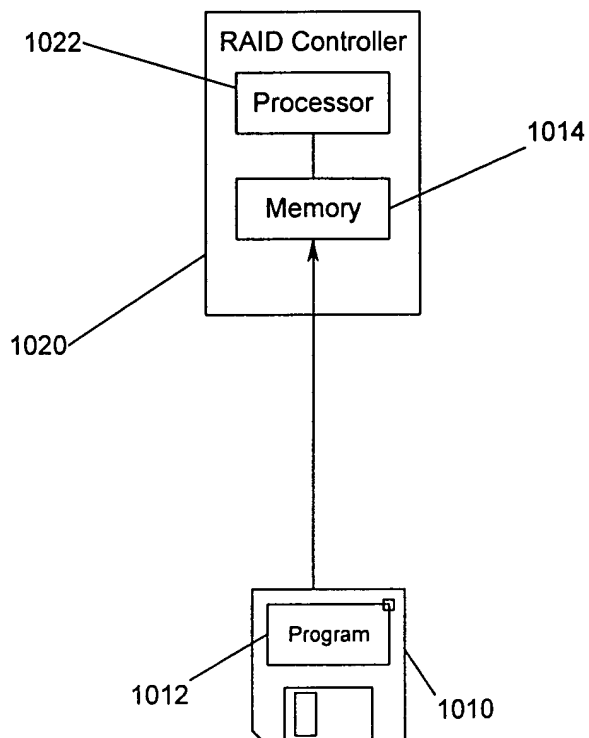


Fig. 10